

PRS-108X85-20

OPERATING FEATURES

- All Wagner-Smith Equipment Co. reel stands feature a disc/ hydraulically applied caliper braking system designed for safe, smooth payout.
- Hydraulic power package rewind to allow the operator to rewind conductor via a hydraulic supply when job is completed
- Quick change type reel and spindle assemblies lift straight out of the unit without having to shift to the side. No tools are required for reel removal.
- For use in Transmission applications



MODEL PRS-108X85-30 SPECIFICATIONS

STANDARD FEATURES

• Brake Type Hydraulically applied caliper actuated by a hand pump and

valve package

Brake Disc28" diameter ASTM 588 steel

• Air / Hydraulic Booster Max. air supply pressure 100 psi


UNIT PERFORMANCE - REEL CAPACITY

Max. Reel Diameter 108"Max. Reel Width 85"

• Max. Reel Weight 30,000 lbs.

Spindle Diameter 5 inches complete with locking collars

5" OD X 3" ID SPINDLE MAX REEL WEIGHTS

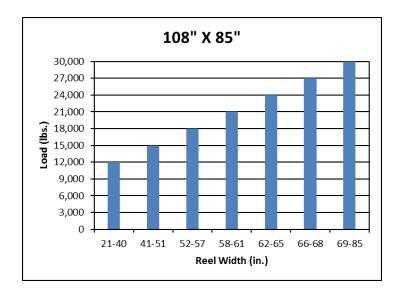

HYDRAULIC POWER REQUIREMENTS

Flow 20 GPM
Pressure 2,500 PSI

DIMENSIONS & WEIGHT

Unit Length 7'6"
Unit Width 10'8¼"
Unit Height 5'10¾"
Net Weight 2,800 lbs.







