

# PRS-108X85-30

# **OPERATING FEATURES**

- All Wagner-Smith Equipment Co. reel stands feature a disc/ hydraulically applied caliper braking system designed for safe, smooth payout.
- Hydraulic power package rewind to allow the operator to rewind conductor via a hydraulic supply when job is completed
- Quick change type reel and spindle assemblies lift straight out of the unit without having to shift to the side. No tools are required for reel removal.
- For use in Transmission applications



**MODEL PRS-108X85-30 SPECIFICATIONS** 

### **STANDARD FEATURES**

• Brake Type Hydraulically applied caliper actuated by a hand pump and

valve package

Brake Disc 28" diameter ASTM 588 steel

• Air / Hydraulic Booster Max. air supply pressure 100 psi


## **UNIT PERFORMANCE - REEL CAPACITY**

Max. Reel Diameter 108"Max. Reel Width 85"

Max. Reel Weight 30,000 lbs.

Spindle Diameter 5 inches complete with locking collars

### 5" OD X 3" ID SPINDLE MAX REEL WEIGHTS

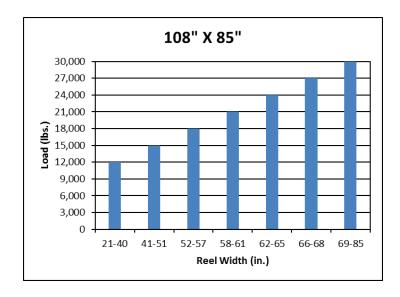

#### **HYDRAULIC POWER REQUIREMENTS**

Flow 20 GPM
Pressure 2,500 PSI

# **DIMENSIONS & WEIGHT**

Unit Length
Unit Width
Unit Height
Net Weight
7'6"
5'10%"
2,800 lbs.







