



The Wagner-Smith Equipment Co. **Model RS-108x80-20** reel stands features a hydraulic applied caliper braking system designed for a safe, smooth payout in Transmission applications. The reel stand is designed for reels up to 108" OD and 80 inches wide and 20,000 pound reels with a 5" spindle.


OPERATING FEATURES

Quick change type reel and spindle assemblies lift straight out of the unit without having to shift to the side. No tools are required for reel removal.


STANDARD FEATURES

- Brake Type: Hydraulically applied caliper actuated by a hand pump and valve package and air/hydraulic booster. Max air supply pressure 100 psi
- Brake Disc: 28" diameter ASTM 588 steel

2-3/4" SPINDLE MAX REEL WEIGHTS

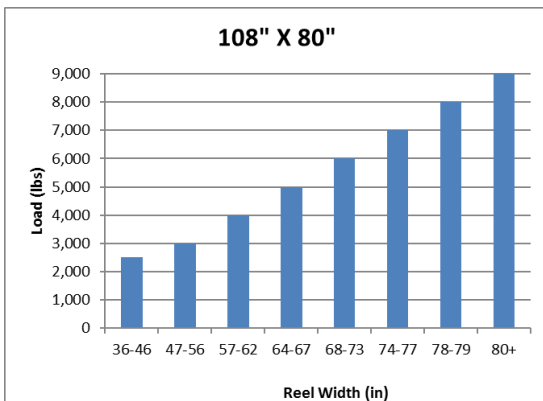

3 1/2" SPINDLE MAX REEL WEIGHTS

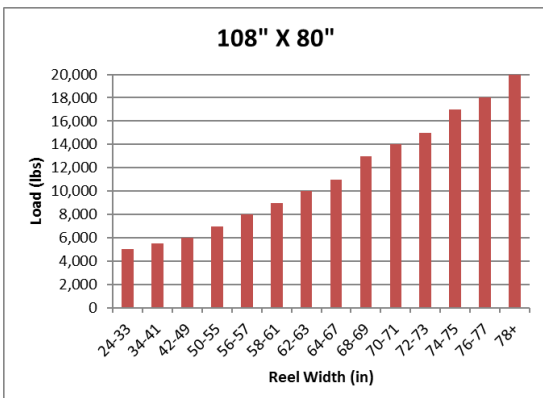

MODEL RS-108 X 80-20 SPECIFICATIONS

UNIT PERFORMANCE - REEL CAPACITY

- Quantity: One (1)
- Max. Reel Diameter: 108"
- Max. Reel Width: 80"
- Max. Reel Weight: 20,000 lbs. (each)
- Spindle Diameter: 5" complete with locking collar

DIMENSIONS & WEIGHT

- Unit Length: 7'6"
- Unit Width: 9'11"
- Unit Height w/o reel: 6'10"
- Net Weight: 2,350 lbs.

OPTIONS

Mechanical / Hydraulic rewind

1-800-666-6567

wagnersmithequipment.com



47108-13R