



SAFE, SMOOTH PAYOUTS EVERY TIME.

FEATURES

QUICK CHANGE REEL AND
SPINDLE ASSEMBLIES


HYDRAULICALLY APPLIED
BRAKE

FOR USE IN
TRANSMISSION
APPLICATIONS

FEATURES DISC/HYDRAULIC CALIPER APPLICATION FOR BRAKING.

This reel stand is designed for a safe, smooth payout in transmission applications. Reel supports up to 108" and 30,000 lbs.


With quick change reel and spindle assemblies, they lift straight out without needing to shift side to side. No tools required.

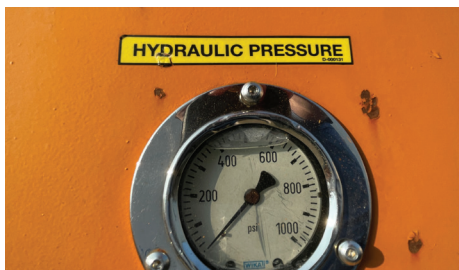

47108-25R

RS-108X85-30 SPECIFICATIONS

STANDARD FEATURES	
Brake Type	Hydraulic when using installed hand pump
Brake Disc	28" diameter
Air/Hydraulic Booster	Max. air pressure 100 psi
Spindle Diameter	5"
HYDRAULIC POWER REQUIREMENTS	
Flow	20 GPM
Pressure	2,500 psi
REEL CAPACITY	
Max. Diameter	108"
Max. Width	80"
Max. Weight	20,000 lbs.
Spindle Diameter	2 3/4" and 3 1/2" Options available
2 3/4" Spindle Assembly	350 lbs.
3 1/2" Spindle Assembly	450 lbs.
DIMENSIONS & WEIGHT	
L X W X H	7'6" x 10'4" x 6'10"
Net Weight	2,500 lbs.

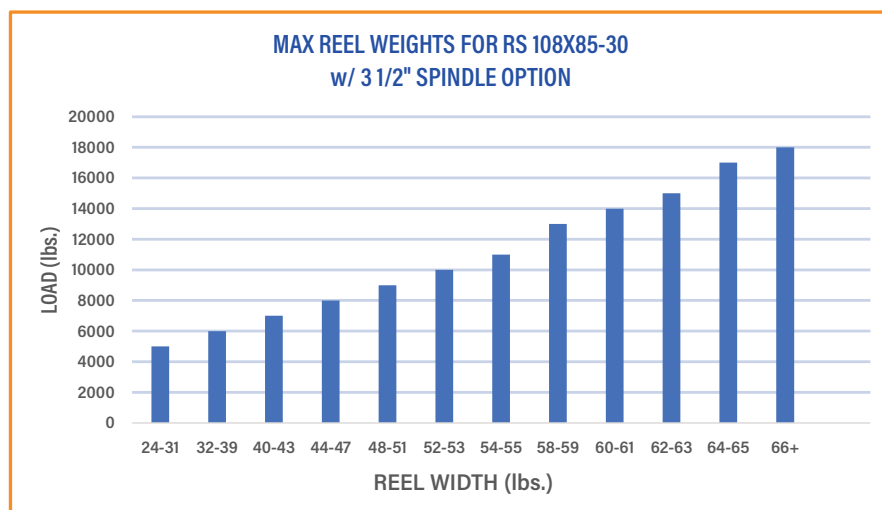

EQUIPPED LOCATIONS NATIONWIDE

All equipment is available for purchase and rental through our five locations across the USA. We want to be prepared for all of your demands because we are dedicated to helping the industry whenever you need it.

ASSEMBLED IN THE USA

All Wagner-Smith Equipment Co. equipment are assembled in our state-of-the-art facilities in Lawrenceville, IL and Burleson, TX. Replacement parts are quickly fulfilled from our Burleson, TX location and shipped to anywhere in North America.

**Wagner
Smith**
Equipment Co.

To learn more or find a location nearest you,
please visit **WagnerSmith.com**

47108-25R

REV. 2023