



HEAVY DUTY PULLING, JUST GOT A LOT SIMPLER WITH THIS SINGLE DRUM UNIT.




A VERSATILE UNIT THAT CAN BE USED IN A WIDE RANGE OF APPLICATIONS.

This internally pressured compensated closed-loop hydraulic system minimizes heat buildup of fluid while in tension. Setting your desired pulling pressure is now able to be preset.



Spring applied, hydraulic pressure released safety brake is standard in the main drive line for operator safety.

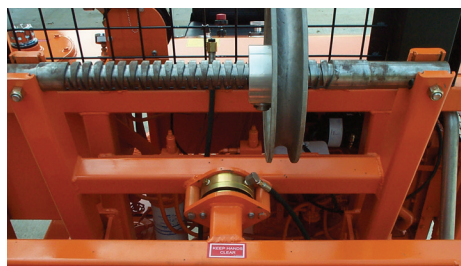

All unit operating controls are located at the operator's station, off the ground, for the operator's safety.

FEATURES

CLOSED-LOOP
HYDRAULIC SYSTEM

SAFETY BRAKE FOR MAIN
DRIVE LINE

FOR USE IN
TRANSMISSION
APPLICATIONS`

APPROXIMATE LINE CAPACITY

10,000' of 5/8" Rope
15,000' of 5/8" Synthetic Rope

40300-11R

T-1DP-300 SPECIFICATIONS

STANDARD FEATURES	
Engine	173 IT4 diesel
Fuel Capacity	35 gallons
Levelwind	Post type with removable top roller, hydraulically driven
Brakes	Full air with ABS brake system
Tires	315/80R22.5
Axles	Tandem - 25,000 lbs. capacity per
Front Hitch	Adjustable 3" lunette eye
Lighting	DOT regulated (LED)
Jacks	Front/Rear hydraulically operated
Grounding	Mounted front and rear lugs
Operator Panel	Aluminum protective cover
Freewheeling	Brake shoe with 3" wide lining
Hydraulic Tank	70 gallons
UNIT PERFORMANCE (Standard Pulling Reel)	
Continuous Torque Rating	300,000 in. lbs.
Line Speed (Average)	3.25 mph
Full Drum Line Pull Rating	10,000 lbs.
STANDARD PULLING REEL	
Diameter	56"
Inside Width	50"
Core Diameter	30"
Approximate Line Capacity	25,000 1/2" Wire Rope
DIMENSIONS & WEIGHT	
L X W X H	24'3" X 8' X 10'2"
Net Weight without Wire Rope	22,710 lbs.
GVWR	37,240 lbs.
GAWR	34,000 lbs.
Tongue Weight	3,240 lbs.

EQUIPPED LOCATIONS NATIONWIDE

All equipment is available for purchase and rental through our five locations across the USA. We want to be prepared for all of your demands because we are dedicated to helping the industry whenever you need it.

ASSEMBLED IN THE USA

All Wagner-Smith Equipment Co. equipment are assembled in our state-of-the-art facilities in Lawrenceville, IL and Burleson, TX. Replacement parts are quickly fulfilled from our Burleson, TX location and shipped to anywhere in North America.

*Wagner-Smith Equipment Co. reserves the right to change the specification of any unit at any time without prior notice. This spec sheet is only a statement of general specifications on the date of this publication.

To learn more or find a location nearest you, please visit **WagnerSmith.com**



**Wagner
Smith**
Equipment Co.

40300-11R

REV. 2023