

T-1DPT-90-FT4




FEATURES

CLOSED-LOOP HYDRAULIC SYSTEM

HEAVY DUTY PULLING, JUST GOT A LOT SIMPLER WITH THIS SINGLE DRUM UNIT.







A VERSATILE UNIT THAT CAN BE USED IN A WIDE RANGE OF APPLICATIONS.

This internally pressured compensated closed-loop hydraulic system minimizes heat buildup of fluid while in tension. Setting your desired pulling pressure is now able to be preset.

Reel and spindle assemblies lift straight out without needing to shift to the side. A spring applied, hydraulic pressure safety brake is standard in the main drive line. EASY SPINDLE REPLACEMENT

FOR USE IN TRANSMISSION & DISTRIBUTION APPLICATIONS`


APPROXIMATE LINE CAPACITY

10,000' of 5/8" Rope 15,000' of 5/8" Synthetic Rope



T-1DPT-90-FT4 SPECIFICATIONS

STANDARD FEATURES	
Engine	74 hp FT4 diesel
Fuel Capacity	19 gallons
Levelwind	Post type with removable top roller, hydraulically driven
Brakes	Electric with breakaway switch
Tires	215/75R17.5 Load Rating "H"
Axles	Tandem - 8,000 lbs. capacity per
Front Hitch	Adjustable 3" lunette eye
Lighting	DOT regulated (LED)
Jacks	Front manual crank/Rear manual pin
Grounding	Mounted front and rear lugs
Operator Seat	Adjustable with foot rest
Tie Downs	3 1/2" inside diameter ears
Operator Panel	Control cover supplied
Safety Chain	Supplied with hooks
UNIT PERFORMANCE (Standard Pulling Reel)	
Continuous Torque Rating	90,000 in. lbs.
Line Speed (Average)	0-4 mph
Full Drum Line Pull Rating	3,750 lbs.
STANDARD PULLING REEL	
Diameter	48"
Inside Width	44"
Core Diameter	18"
Standard Length	10,000 5/8" Rope
Maximum Line Length	15,000' of 5/8" Synthetic Rope
DIMENSIONS & WEIGHT	
LXWXH	19'10" X 8' X 8'4"
Net Weight without Rope	8,250 lbs.
GVWR	18,250 lbs.
GAWR	16,000 lbs.
Tongue Weight	2,230 lbs.
	·

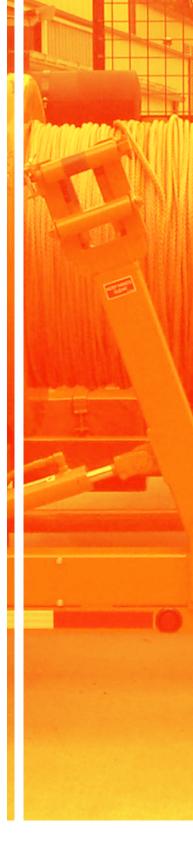

EQUIPPED LOCATIONS NATIONWIDE

0

(in

All equipment is available for purchase and rental through our five locations across the USA. We want to be prepared for all of your demands because we are dedicated to helping the industry whenever you need it.

ASSEMBLED IN THE USA

All Wagner-Smith Equipment Co. equipment are assembled in our state-of-the-art facilities in Lawrenceville, IL and Burleson, TX. Replacement parts are quickly fulfilled from our Burleson, TX location and shipped to anywhere in North America.

*Wagner-Smith Equipment Co. reserves the right to change the specification of any unit at any time without prior notice. This spec sheet is only a statement of general specifications on the date of this publication.





