



TRAILER MOUNTED HEAVY DUTY PULLER FOR TRANSMISSION STRINGING APPLICATIONS.




HEAVY DUTY STRINGING PULLER FOR THOSE MULTIPLE PULLS

The internal pressure compensated closed-loop hydraulic system minimizes heat build up of hydraulic fluid and can preset desired pulling pressure. A spring applied, hydraulic pressure released safety brake is standard in the main drive line for operator safety.



All unit operating controls are located at the operators station, off the ground, for operator safety. Touchscreen display/ electronics package — Now logs pull data, limits customer from damaging equipment because of "over limit" function. User can now see engine alerts and more detailed system alerts.

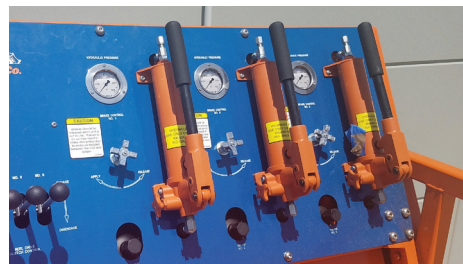

FEATURES

HYDRAULIC BRAKED BULLWHEEL

"HAUL BACK" PULL IN MODE

ONE, TWO OR THREE CONDUCTORS SIMULTANEOUSLY

41200-15R

T-3DP-200-FT4 SPECIFICATIONS

STANDARD FEATURES	
Levelwind	Hydraulically operated post type with swing out top roller
Engine	140 HP FT4
Front Hitch	Fifth wheel
Lighting	DOT regulation LED
Diesel	35 gallon
Jacks	Hydraulically operated
Hydraulic	100 gallon
Suspension	Heavy duty hutch/leaf spring
Tie Downs	3 1/2" ID Tie down ears at each corner
Grounding	Mounted front and rear lugs
Brakes	Full air ABS brake system
Wheel Chocks	Standard
Tires	455/55R22.5 Load range "L"
Freewheeling	42" diameter disc brake
UNIT PERFORMANCE	
Maximum Tension Rating	200,000 lbs.
Line Speed	4 mph.
Full Drum Line Pull Rating	6,400 lbs. 3/8" Steel Rope
	6,800 lbs. 1/2" Dyneema Rope
STANDARD PULLING DRUM	
Quantity	3
Diameter	62"
Inside Width	48"
Core Diameter	32"
Maximum Line Capacity	25,000' of 3/8" Steel Rope
	25,000' 1/2" Dyneema Rope
DIMENSIONS & WEIGHT	
L X W X H	33'10" x 8' x 13'6"
Net Weight Empty	35,320 lbs.
GVWR	59,200 lbs.
GAWR	34,000 lbs.
Tongue Weight	24,800 lbs. (Full drum wire rope)



EQUIPPED LOCATIONS NATIONWIDE

All equipment is available for purchase and rental through our five locations across the USA. We want to be prepared for all of your demands because we are dedicated to helping the industry whenever you need it.

ASSEMBLED IN THE USA

All Wagner-Smith Equipment Co. equipment are assembled in our state-of-the-art facilities in Lawrenceville, IL and Burleson, TX. Replacement parts are quickly fulfilled from our Burleson, TX location and shipped to anywhere in North America.

*Wagner-Smith Equipment Co. reserves the right to change the specification of any unit at any time without prior notice. This spec sheet is only a statement of general specifications on the date of this publication.

To learn more or find a location nearest you, please visit **WagnerSmith.com**



**Wagner
Smith**
Equipment Co.

41200-15R

REV. 2023