




**THE PERFECT UNDERGROUND PULLING UNIT IS
HERE; WITH OR WITHOUT AIR COMPRESSOR**



**ELECTRONIC MONITORING SYSTEM
MAKES PULLING EASY**

Hydrostatic drive for capstan system and rope drum, this unit is perfect for pulling capabilities up to 2,600'. With the fully enclosed metal hood, it protects all components and provides easy access to control panel and internal components for maintenance and/or repair.

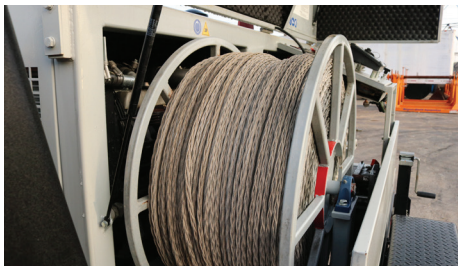

The steel wire rope runs directly from the capstan system to the storage drum. An automatic levelwind system guarantees smooth winding of the cable.



FEATURES

WITH OR WITHOUT AIR
COMPRESSOR

DOUBLE CAPSTAN
SYSTEM

HYDRAULICALLY DRIVEN
WITH ELECTRIC START

30071-14R

WDR505/WDR505A SPECIFICATIONS

STANDARD FEATURES	
Engine	45 HP Kohler diesel
Monitoring	Electronic
Capstan	Double with both heads driven
Drive	Hydraulic
Tires	185/R14
Grounding Lugs	Front & Rear mounted
Lighting	DOT Regulation LED
Trailer	6 way plug
Tool Box	Supplied
<i>Specs are for standard unit without air compressor. * WDR505A Model Number for Unit with Air Compressor.</i>	
UNIT PERFORMANCE	
Pulling Force	11,250 lbs.
Maximum Speed	219 ft./min.
Continuous Pulling Speed	9,000 lbs.
Cable Length	2,300' steel cable
Cable Diameter	5/8"
DIMENSIONS & WEIGHT	
L X W X H	21' x 6'4" x 9'5"

EQUIPPED LOCATIONS NATIONWIDE

All equipment is available for purchase and rental through our five locations across the USA. We want to be prepared for all of your demands because we are dedicated to helping the industry whenever you need it.



*Wagner-Smith Equipment Co. reserves the right to change the specification of any unit at any time without prior notice. This spec sheet is only a statement of general specifications on the date of this publication.

To learn more or find a location nearest you,
please visit [WagnerSmith.com](https://www.WagnerSmith.com)



**Wagner
Smith**
Equipment Co.

30071-14R

REV. 2023