



THE VERSATILE OPTION FOR BOTH TENSIONING AND TRANSPORTING.



EASY OPERATION WITH USER CONTROLLED PANEL

The reel and spindle assembly lifts straight out of the machine without having to shift to the side. No tools required for reel removal.

With corrosion resistant steel brake discs, you will get standard smooth operation and low maintenance.



All unit operating controls are located at the operator's station, off the ground, for operator safety. The fairlead roller assembly is provided as standard between bullwheel and reel. Unit is designed with canted bullwheels to reduce twist on conductor.



FEATURES

EASY LIFT REEL SPINDLES FOR REPLACEMENT

CANTED BULLWHEELS FOR TWIST REDUCTION

FAIRLEAD ROLLER ASSEMBLY PROVIDED


OPTIONS AVAILABLE:

- ▶ 2 3/4 to 5 1/4 Standard Reel Arbor Adapters
- ▶ Rear jacks with manual crank type
- ▶ Multiple reel carrier (stands)
- ▶ Manual reel rewind complete with crank
- ▶ Hydraulic reel rewind motor & hoses
- ▶ Rear crank jacks
- ▶ Capstan with Hydraulic / Engine package

46038-18R

T-BWT-4-38-RC SPECIFICATIONS

STANDARD FEATURES	
Tension Brakes	Hydraulically actuated 28" diameter caliber
Reel Brakes	Hydraulically actuated 20" diameter caliber
Front Hitch	Adjustable 3" lunette eye
Lighting	DOT regulation LED
Electrical Plug	6 way pin
Jacks	Front & Rear manual
Tires	215/75/R17.5 Load Range "H"
Axle	Tandem 8,000 lb. capacity
Suspension	Leaf spring
Brakes	Electric with breakaway switch
Tie Downs	Front and rear mounted
Grounding	Mounted front and rear lugs
Wheel Chocks	Standard
UNIT PERFORMANCE	
Maximum Tension Rating	4,000 lbs.
Line Speed	4 mph.
BULLWHEEL TENSIONER	
Diameter	37" (bottom of groove)
Groove Diameter	1.50"
Number of Grooves	5
Replacement Segments	Yes
Bullwheel Lining	Elastomer (bolt on)
REEL CARRIER	
Quantity	1
Max. Reel Diameter	90"
Max. Reel Width	56"
Max. Reel Weight	10,000 lbs.
Spindle Diameter	2 3/4" complete with locking collars
DIMENSIONS & WEIGHT	
L X W X H	19' x 8' x 9'4"
Net Weight	6,100 lbs.
GVWR	18,200 lbs.
GAWR	16,000 lbs.
Tongue Weight	2,260 lbs.

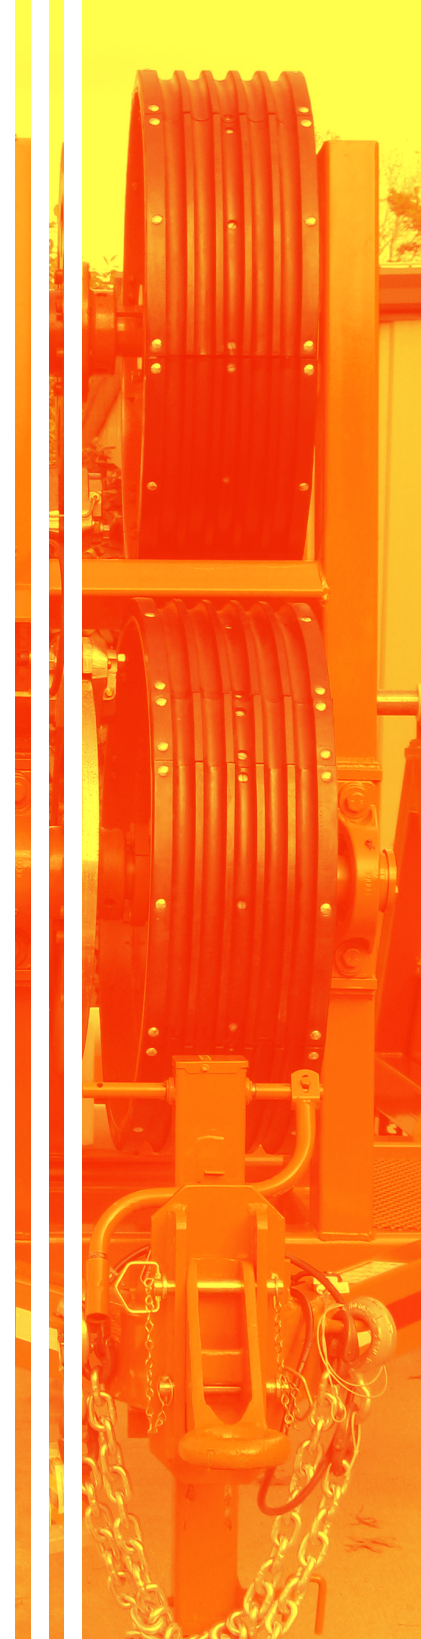

EQUIPPED LOCATIONS NATIONWIDE

All equipment is available for purchase and rental through our five locations across the USA. We want to be prepared for all of your demands because we are dedicated to helping the industry whenever you need it.

ASSEMBLED IN THE USA

All Wagner-Smith Equipment Co. equipment are assembled in our state-of-the-art facilities in Lawrenceville, IL and Burleson, TX. Replacement parts are quickly fulfilled from our Burleson, TX location and shipped to anywhere in North America.

*Wagner-Smith Equipment Co. reserves the right to change the specification of any unit at any time without prior notice. This spec sheet is only a statement of general specifications on the date of this publication.

To learn more or find a location nearest you, please visit [WagnerSmith.com](https://www.WagnerSmith.com)



**Wagner
Smith**
Equipment Co.

46038-18R

REV. 2023