


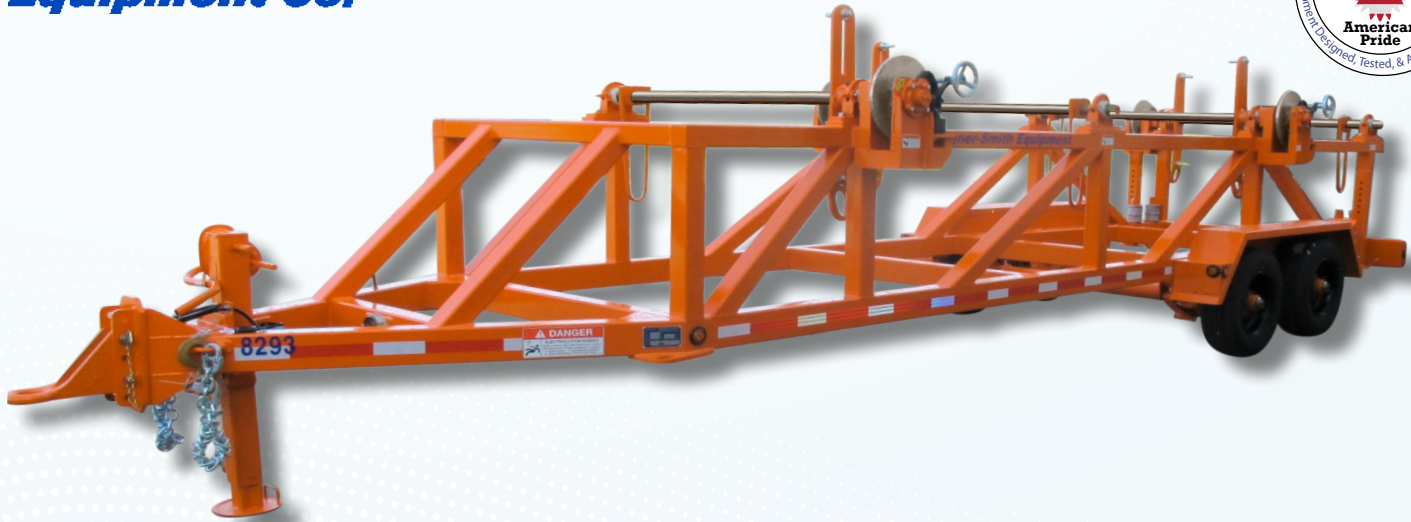

The Wagner-Smith Model T-RC-72X52-20 reel carrier is a four-place reel carrier used for distribution applications. It is built to transport cable or conductor reels measuring up to 72 inches in diameter, 52 inches in width, and weighing up to 5,000 pounds per reel.

Key Features

- Reel spindles are engineered for quick, tool-free changes. Two flip-open bearing caps allow for fast reel replacement; simply open the caps and lift the spindle straight up
- Accomodates a variety of spool sizes for added jobsite flexibility
- Provides precise, operator-controlled braking force with individual failsafe hand-wheels

Unit Performance	
Payload Rating	5,000 lbs.
Reel Capacity	Four
Reel Lift	Quick lift, no tools required
Reel Specs	
Max. Diameter	72"
Max. Width	52"
Spindle Diameter	2 3/4" with locking collar
Reel Loading	Quick change type without altering reel brake adjustment
Reel Brakes	Manually actuated caliper 16" dia. disc
Towing	
Lighting	DOT Regulated LED
Electrical Plug	6 way pin
Jacks	Front manual crank type/rear manual pin type
Axles	Tandem 12,000 lb. capacity
Trailer Brakes	Electric with breakaway switch
Front Hitch	Adjustable 3" lunette eye
Suspension	Slipper leaf spring

Dimensions & Weight	
L X W X H	31'7" x 8' x 7'7"
Unit Weight	7,480 lbs.
GVWR	28,141 lbs.
GAWR	24,000 lbs.
Tongue Weight	1,220 lbs.

Supports Safer, Smarter Distribution Workflows



Rental Item #: **47072-17R**

For additional details on the T-RC-96x54-12, view the operator's [manual](#).