


Designed for Flexibility.

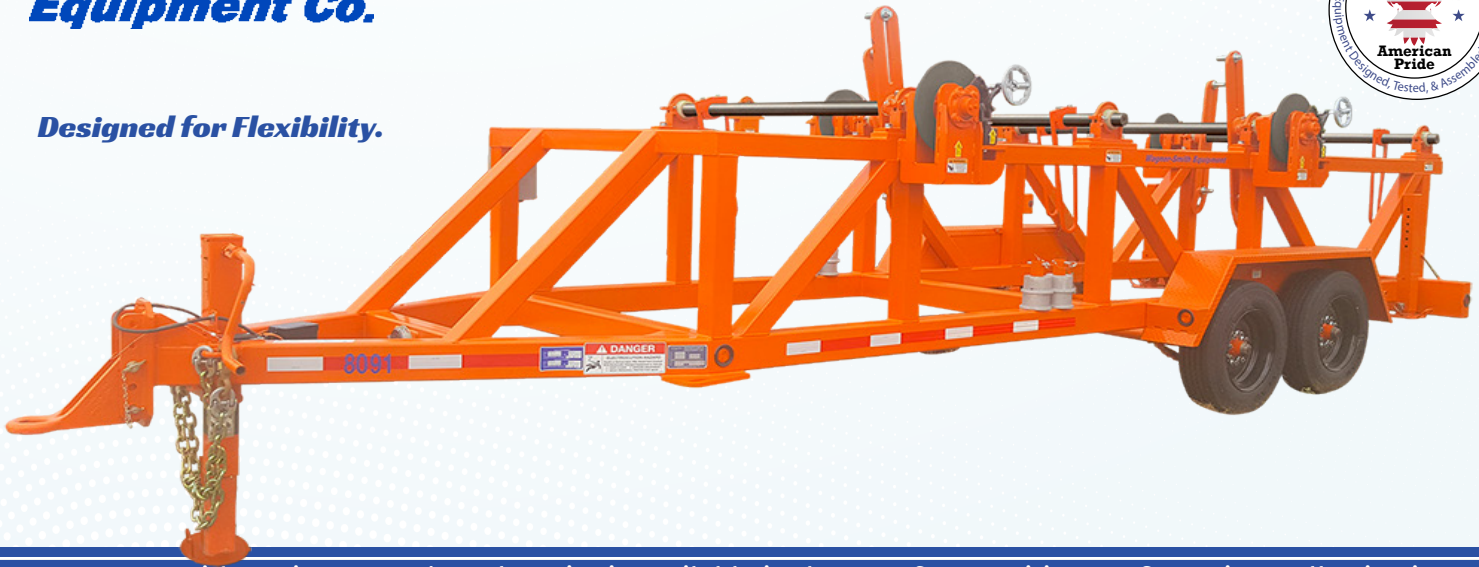

Wagner-Smith Equipment Co.'s reel carrier is available in three-or four-position configurations, allowing it to transport up to four cable or conductor reels depending on the setup. Removable spindles add versatility, enabling the unit to be easily adapted to meet specific jobsite requirements. It is well-suited for distribution projects that require multiple reel configurations, such as the T-3RC-72x52-16 with two 72-inch reels and one 48" x 48" reel, or the T-4RC-48x48-16 configured for four 48" x 48" reels.

Key Features

- Reel spindles are designed for quick changes and require no additional tools. Two flip-open bearing caps allow for fast, tool-free reel replacement; lift open the caps and pull the spindle straight up
- Allows a variety of spool sizes and configurations for added jobsite flexibility
- Manual brakes offer controlled braking force with individual hand-wheels

Unit Performance	
Payload Rating	3,085 lbs.
Reel Capacity	Three to four reel positions
Reel Lift	Quick lift, no tools required
T- 4RC-48x48-16 - Standard Setup Reel Specs	
Max. Diameter	48"
Max. Width	48"
Spindle Diameter	2 3/4" with locking collar
Max. Reel Weight	3,085 lbs. each
Reel Loading	Quick change
Reel Brakes	Manually actuated caliper 16" disc
T- 3RC-72x52-16 - Alternate Reel Configuration Specs	
Quantity	3 reels when the second front spindle (closest to the trailer hitch) is removed
Max. Diameter	72"
Max. Width	52"
Max. Reel Weight	4,115 lbs. each

Towing	
Lighting	DOT regulation LED
Electrical Plug	6 way pin
Jacks	Front/rear pin type
Axles	Tandem 8,000 lbs. capacity
Trailer Brakes	Electric with breakaway switch
Front Hitch	Adjustable 3" lunette eye
Suspension	Slipper leaf spring
Dimensions & Weight	
Overall Dimensions (L x W x H)	43' 2" x 8' 6" x 13' (12' 8" in transport mode)
Net Weight (empty)	6,100 lbs.
GAWR	18,200 lbs.
GVWR	16,000 lbs.
Tongue Weight	2,260 lbs.

Rental Item #: **47048-16R**

For additional details on the T-3RC-72x52-16 or the T-4RC-48x48-16, view the operator's [manual](#).