




YOUR MULTIPLE REEL CARRIER TRAILER IS HERE; READY FOR THE LONG HAUL.



CAPABLE TO CARRY REELS OR CONDUIT

A trailer mounted, four place reel carrier used for Distribution, the Wagner-Smith Equipment Co. Model T-4RC-72x52-20 is designed to transport and tension cable or conductor reels up to 72" in diameter, 52" wide, and weighing up to 5,000 pounds per reel.

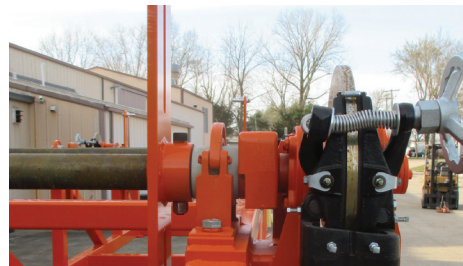

Quick change spindles lift straight out, requiring no tools. All wiring is protected by the frame and is engineered for optimum performance and safety.



Reel spindles may incorporate an optional mechanical manual rewind to allow the operator to rewind conductor via a hand crank or external hydraulic supply when job is completed.

FEATURES

QUICK CHANGE
SPINDLES, REQUIRE NO
TOOLS

VERSATILITY IN SIZE OF
SPOOLS

DESIGNED FOR OPTIMAL
PERFORMANCE AND
SAFETY

47072-17R

T-4RC-72X52-20 SPECIFICATIONS

STANDARD FEATURES	
Front Hitch	Adjustable 3" lunette eye
Lighting	DOT regulation LED
Electrical Plug	6 way pin
Jacks	Front/Rear manual crank
Tires	235/75R17.5 Load Range "H"
Axles	Tandem 12,000 lb. capacity each
Suspension	Slipper leaf spring
Brakes	Electric with breakaway switch
Wheel Chocks	Standard
Ground Lugs	Front/Rear mounted
Tie Downs	Front/Rear frame mounted
Brake Disc	ASTM 588 steel
UNIT PERFORMANCE - REEL CARRIER	
Quantity	4
Max. Reel Diameter	72"
Max. Reel Width	52"
Max. Reel Weight	5,000 lbs. each
Spindle Diameter	2 3/4"
Reel Loading	Quick lift, no tools required
Reel Brakes	Manually actuated caliper with 16" disc
DIMENSIONS & WEIGHT	
L X W X H	31'7" x 8' x 6'3"
Net Weight	7,480 lbs.
GVWR	28,141 lbs.
GAWR	24,000 lbs.
Tongue Load Empty	1,220 lbs.



EQUIPPED LOCATIONS NATIONWIDE

All equipment is available for purchase and rental through our five locations across the USA. We want to be prepared for all of your demands because we are dedicated to helping the industry whenever you need it.

ASSEMBLED IN THE USA

All Wagner-Smith Equipment Co. equipment are assembled in our state-of-the-art facilities in Lawrenceville, IL and Burleson, TX. Replacement parts are quickly fulfilled from our Burleson, TX location and shipped to anywhere in North America.

*Wagner-Smith Equipment Co. reserves the right to change the specification of any unit at any time without prior notice. This spec sheet is only a statement of general specifications on the date of this publication.

To learn more or find a location nearest you, please visit **WagnerSmith.com**



**Wagner
Smith**
Equipment Co.

47072-17R

REV. 2023