

## Built to Lead.

Bottom Line - The PRS 108x85-30 combines heavy-duty load capacity with effortless operation—making it the go-to choice for demanding transmission projects.



The Wagner Smith PRS 108x85-30 dominates the field with unmatched strength and capacity for heavy reels. Engineered for efficiency, it features a tool-free quick-change spindle and a precision hydraulic brake/rewind system—two game-changing innovations that set it apart from the competition. When paired with an external power pack, it delivers smooth, controlled conductor rewind with maximum safety and peak performance.

Reel Capacity	
Max Reel Diameter	108"
Max Reel Width	85"
Max Reel Weight	30,000 lbs.
Standard Features	
Brake Type	Hydraulically applied caliper actuated by a hand pump and valve package
Brake Disc	28" diameter ASTM 588 steel
Air Hydraulic Booster	Max. air supply pressure 100 psi
Spindle Type	5" Steel, with locking collar
Hydraulic Hose	(2) 20'
Hydraulic Power Requirements	
Max Flow	20 GPM
Max Pressure	2,500 PSI
Dimensions & Weight	
L X W X H	10'10" x 7'6" x 6'
Unit Weight without Cable	2,800 lbs.
Optional Accessories	
Arbor bushings available to fit most sizes	
Power Pack	
Spindles	3.5" Spindle

## Where Power Meets Precision.

Equipped with:  
**Quick-Change Reel and Spindle Assemblies**


Spindles lift out vertically; no tools or side clearance needed.



## Hydraulic Brake System

The 28" hydraulic disc brake delivers smooth payouts, precise tensioning, and superior safety—outperforming manual systems.

Load capacity is dependent on reel width: As the reel width increases, the load capacity increases incrementally. Refer to the tables below for guidance when loading the reel stands:

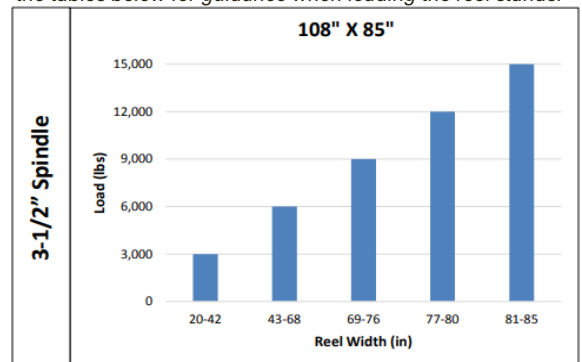

Rental Item #: **47108-36R**